


ESAD25M(C,N,D) (15A) (200V to 400V / 15A)

FAST RECOVERY DIODE

■ Outline drawings, mm

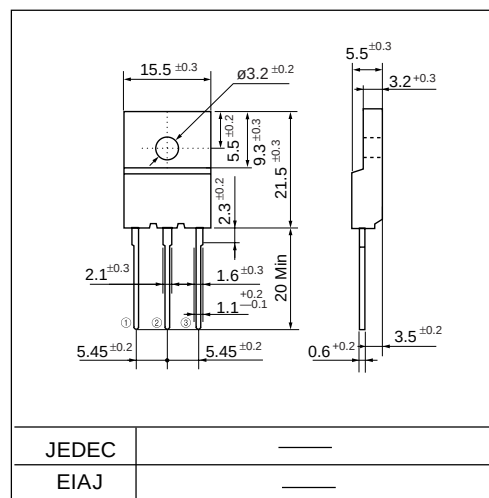

■ Features

- Insulated package by fully molding
- High voltage by mesa design
- High reliability


■ Applications

- High speed switching

■ Maximum ratings and characteristics

- Absolute maximum ratings

■ Connection diagram

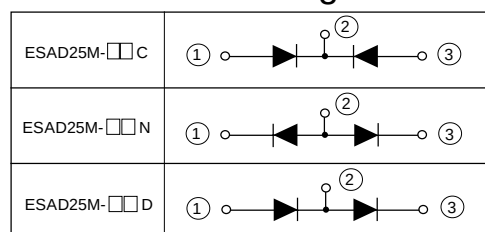

Item	Symbol	Conditions	Rating		Unit
			-02	-04	
Repetitive peak reverse voltage	V_{RRM}		200	400	V
Non-repetitive peak reverse voltage	V_{RSM}		250	450	V
Isolating voltage	Viso	Terminals-to-case, AC.1 min.	1500		V
Average output current	I_o	Square wave, duty=1/2, $T_c=98^{\circ}\text{C}$	15*		A
Surge current	I_{FSM}	Sine wave 10ms	120		A
Operating junction temperature	T_j		-40 to +150		$^{\circ}\text{C}$
Storage temperature	T_{stg}		-40 to +150		$^{\circ}\text{C}$


*Average forward current of centertap full wave connection

- Electrical characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)


Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_{FM}	$I_{FM}=8.0\text{A}$	1.3	V
Reverse current	I_{RRM}	$V_R=V_{RRM}$	0.1	mA
Reverse recovery time	t_{rr}	$I_F=0.1\text{A}$, $I_R=0.1\text{A}$	0.4	μs
Thermal resistance	$R_{th(j-c)}$	Junction to case	2.5*	$^{\circ}\text{C/W}$

Characteristics


Forward characteristics

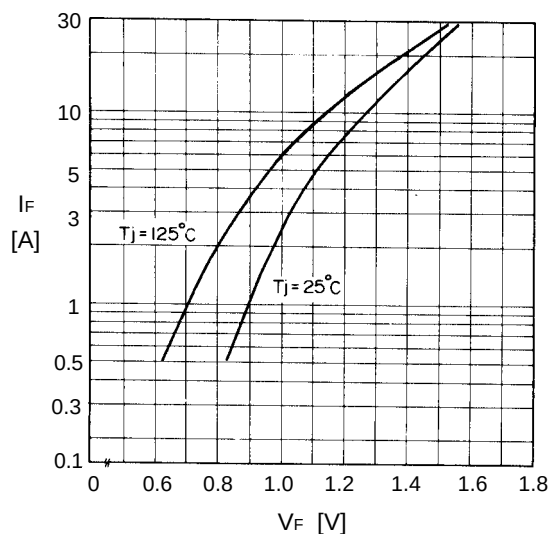


Reverse characteristics

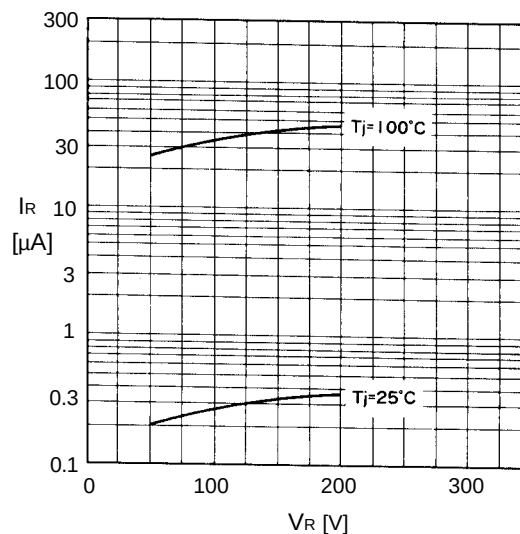


Forward power dissipation

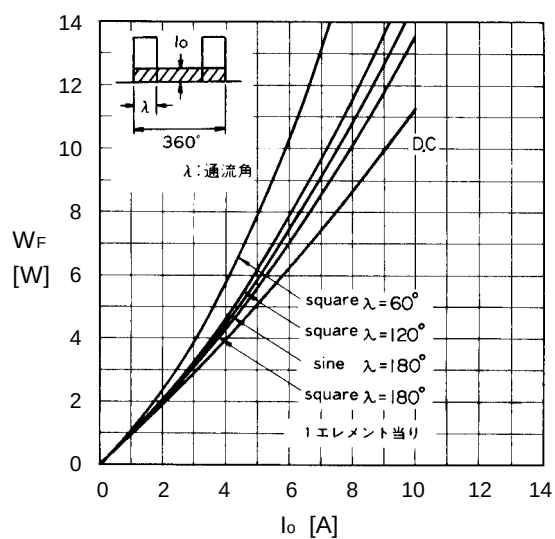

Output current-case temperature

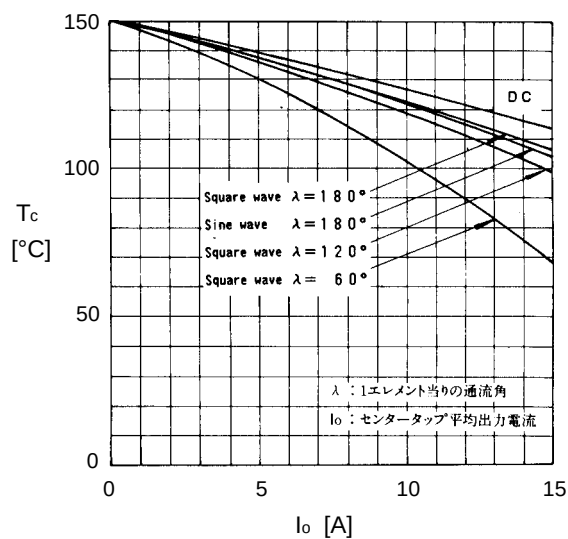

Junction capacitance characteristics

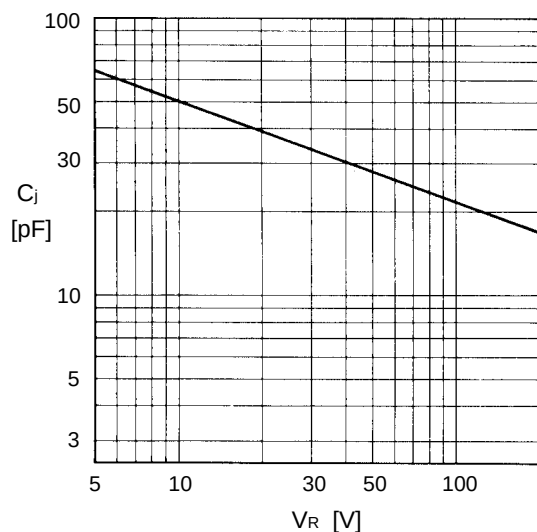

Surge capability

